


## Tiger-Flex® Pool and Spa Hose

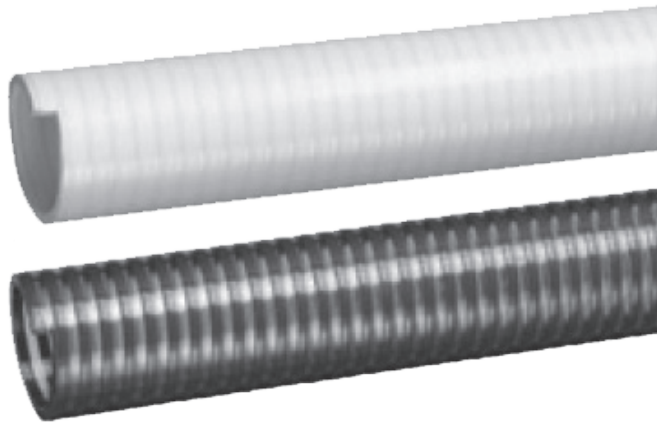

The Tiger-Flex® brand of Pool and Spa hose is assurance to your customers that you care about quality installations. In addition to substantially reducing time on each job, you also save up to 50% of the fittings required when compared to using rigid PVC pipe. Tiger-Flex® Pool and Spa Hose is designed for use with PVC schedule 40 solvent weld fittings only. The temperature range is from -4°F to 150°F. Tiger-Flex® Pool and Spa Hose is the world's leading and original flexible PVC hose. When making pool and spa installations, be sure to apply primer before using solvent cement on the outside of the hose.

This hose is very flexible so it is ideal for working in confined areas and permits installer to make smooth, tight turns which saves time and labor. The smooth bore construction allows unrestricted flow.

### Features:

- Very flexible. Ideal for working in confined areas, it allows installer to make smooth turns.
- Unbeatable for labor saving.
- Smooth bore interior for efficient transfer of water.
- Cost savings – requires less fittings than rigid pipe when plumbing a normal spa or hot tub.
- Standard packages are either 50 feet or 100 feet.

### Applications:

- Swimming Pools
- Spas
- Hot Tubs
- Filters
- Heaters

SOLID CREAM PART #	CLEAR FLEX/ BURGUNDY HELIX PART #	IPS SIZE (IN)	OD		MAX. WORKING PRESSURE (PSI)		VACUUM RATING (IN HG)		MINIMUM BEND DIAMETER @ 68 F (IN)	STD LENGTH	APPROX. WEIGHT (LBS/FT)
			(IN)	(MM)	@68F	@104F	@68F	@104F			
PFH050	F16MBT	1/2"	0.850	21.50	100	70	28	26	2	100/50	0.14
PFH075	F20MBT	3/4"	1.053	26.75	100	70	28	26	2	100/50	0.21
PFH100	F27MBT	1"	1.320	33.52	100	70	28	24	3	100/50	0.28
F36MCR	F36MBT	1 1/4"	1.663	42.25	80	55	28	24	4	100/50	0.37
PFH150	F42MBT	1 1/2"	1.904	48.35	70	50	28	24	4	100/50	0.44
PFH200	F52MBT	2"	2.381	60.48	70	50	28	24	6	100/50	0.58
PFH300	—	3"	3.500	89.00	65	40	28	22	8	50	1.20

### Notes:

- Inside diameter is nominal.
- Tolerance on outside diameters are  $\pm 0.20"$ .
- Vacuum rating on sizes 1" thru 2" is 29.8" HG @ 72 °F
- Not recommended for compressed air or gas service.
- Like other materials, Spa Hoses can be damaged by rodents or insects, including termites. Our warranty does not cover damages caused by them. Spa Hose should not be used underground in areas infested by termites. This product warning shall be given to every purchaser of Spa Hose.
- Use with recommended primers and PVC cements; consult with glue supplier for recommendations.
- Coils of Tigerflex® Spa Hose should not be stacked more than five coils high. Hose which has been stacked high may be damaged over time.