

Directions for installing and using spa cover remover models:




Canadian Patent #2,155,988




US Patent #5,471,685

To install:

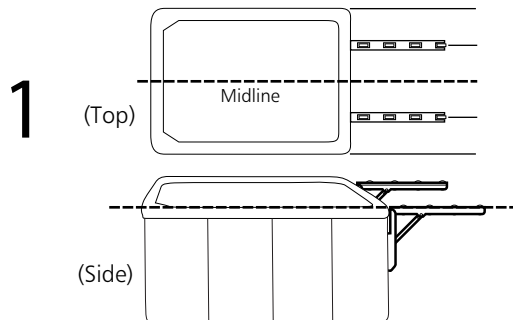

- Position one roller rack so:
- (1) it is halfway between the spa edge and the midline;
 - (2) its top surface is flush with the top of the spa.
- Mark the position of the rack's 6 screw holes in the skirt.
Repeat this procedure locating the other roller rack on the opposite side of the midline.

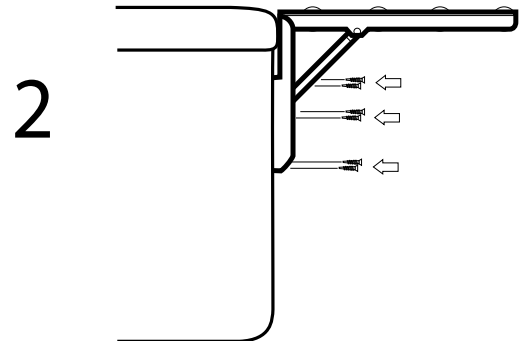


- Secure each roller rack to the spa skirt by inserting all six #10 screws tightly into the screw holes that you marked in the previous step.


NOTE:

If your spa cover is heavy, it is probably saturated with water. Water-saturated foamed-filled covers have very little insulating 'R' value and their excess weight will damage the roller system. If your cover is water saturated, you must replace the foam insert.


To use:

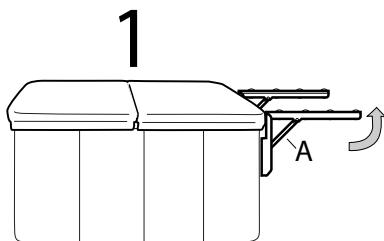

Lock each of the 2 roller racks into position by rotating counter-clockwise, then securing the bottom edge (A) of the brace. Note : Do not bend the roller rack arm more than 90° upward, or damage to the joint may result.

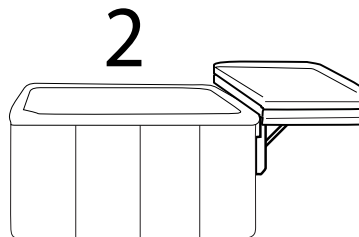

Flip one cover half over the other and push the spa cover on top of the roller racks.
Now, enjoy your spa!



When done, push the folded spa cover back over the spa, then flip the upside half back onto the spa. Release the braces & rotate each roller rack clockwise to the rest position.

CAUTION:

- Do not sit on open cover: DAMAGE WILL RESULT.
- Do not mount roller racks on the front or the equipment side of spa: DAMAGE WILL RESULT.
- Do not twist or move roller racks sideways: DAMAGE WILL RESULT.
- Do not allow weight resting on the roller system to exceed 75 lbs: DAMAGE WILL RESULT.
- For safety reasons, the roller system should be secured in the lowered position after each use.
- If there is snow on the cover, remove all snow before opening or DAMAGE WILL RESULT.